

NEXHO

system

NEXHO-NM – Numeric remote control Assembly and operating instructions



NOTICE

Please read these instructions carefully and keep them for future consultation. NEXHO range equipment must be installed by an accredited, qualified electrician and must observe Low Voltage Regulations. The installation as a whole should meet the provisions of aforesaid regulation. Any claim presented will be deemed invalid if the prevailing regulations have not been met.

TABLE OF CONTENTS

TABLE OF CONTENTS.....	1
INSTRUCTIONS FOR USE	2
General information	2
Specifications.....	2
Where should I install the NEXHO-NM numeric remote control?.....	2
INSTALLATION AND SETUP	3
Installation running on batteries	3
How do I reset the NEXHO-NM numeric remote control?.....	5
GUARANTEE CONDITIONS	7

General information

We would like to thank you for purchasing FARHO's NEXHO-NM numeric remote control.

This device has been designed and manufactured in accordance with the requirements of household appliances, pursuant to the following standards: UNE-EN 60950, UNE-EN 301 489, UNE-EN 61000-6, UNE-EN 300 220.

The NEXHO-NM numeric module enables you to activate or deactivate the security mode of your home by inserting the four digits of the password that you previously set up in your NEXHO-NT internet module or your NEXHO-UC central control unit. Moreover, this remote control allows the user to assign different predefined orders to the different remote control pushbuttons, which enables the control of other elements of the NEXHO system in a quick and simple way.

Specifications

- Standby consumption: <700 nW
- Consumption in alarm mode: <0,2 W
- Emission band 868MHz
- Internal power supply: 3 AAA batteries

Where should I install the NEXHO-NM numeric remote control?

Install the NEXHO-NM numeric remote control at the entrance or entrances of your home, so that you can activate or deactivate the security mode comfortably.


INSTALLATION AND SETUP

Installation running on batteries

Remove the rear cover of the numeric remote control and insert the AAA batteries into the battery chamber, respecting the polarity markings. Close the rear cover again.



Place the wall-mounting bracket provided with the equipment in the appropriate location, making sure that the engraved arrows point up. Use a pencil to mark the location of the fixing screw holes.

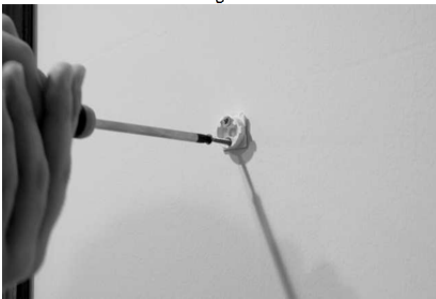


Remove the bracket momentarily and install the insert the screw wall plugs in the locations previously marked. Return the bracket to its location again and drive the screws until it is fully fixed to the wall. Place the remote control in bracket and turn it anticlockwise until it is in a vertical position. You can now use the remote control in this fixed position or remove it from the bracket in order to use it as a remote control.



Please note that the remote control must be configured together with the NEXHO-NT internet control module or the NEXHO-UC central control unit. For that purpose, consult the section on how to install NEXHO-NM remote controls in your automation network in the user manual of the NEXHO-NT internet module or the NEXHO-UC central unit.

How do I reset the NEXHO-NM numeric remote control?

In order to reset the NEXHO-NM numeric module, press the ON button and afterwards keep the button "C" pressed for at least 4 seconds. After some seconds, the alarm will emit a warning signal and it will start to reset. A second sound will indicate that the reset process is finished.

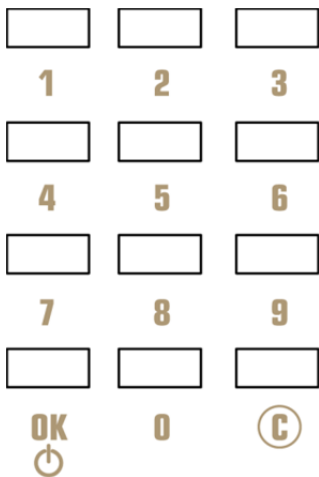



If you had installed the NEXHO-NM numeric remote control in a NEXHO home-automation installation, once it is reset, the remote control will not send the security password to the system until you have re-configured it. To set it up again, please consult the manual of the NEXHO-NT internet module or of the NEXHO-UC central control unit and follow the steps described in the section on how to install the numeric module in the home automation network.

GUARANTEE CONDITIONS

FARHO guarantees the proper and correct operation of this device for 2 years from the delivery date. The guarantee will be valid if the product is subject to normal use.

The guarantee implies that FARHO will, at its sole and unquestionable discretion, repair or replace parts presenting evident defects in materials or workmanship. These must be returned to the factory (delivery costs shall be prepaid by the purchaser). The replaced parts under this warranty will become property of FARHO.

Natural wear and tear of materials or parts is not covered by warranty.

Any other type of compensation is excluded, and no other type of claims on direct or indirect damage of any kind or nature (including to third parties) will be accepted, even if these damages are caused by a temporary lack of use of the purchased products. The examination and evaluation of the defective product can only be performed by FARHO at its premises.

Any expenses or costs related to the external intervention of the seller's workforce (such as labour, transport, food or hotel allowance, product assembly, disassembly, etc.) will be paid by the buyer. The cost of the replaced defective parts and labour related to the time required for the replacement will at FARHO's expense.

The guarantee excludes damages caused by improper handling, care, storage or installation as well as incorrect or negligent maintenance or that which is contrary to FARHO's guidelines. It also excludes damages, defects or malfunctions caused by external components or their incorrect assembly into the device. Modified, repaired or partially dismantled devices are also excluded from this guarantee.

This clause is not intended to limit the liability of the manufacturer in a manner contrary to the provisions of the applicable national law nor to exclude its liability for matters that may not be excluded under those rules.

The buyer waives the guarantee provided in this article should it fail to meet at least one of their contractual obligations, especially with respect to payment terms.

Any possible repairs in or out of warranty must be claimed in writing by the purchaser to FARHO.

Regarding the replaced or repaired parts, and only these, the warranty period recommences and expires three months following replacement or repair.

In the case where FARHO is responsible for defective products, the compensation may not exceed the amount of the purchase price of the product.

In any case, FARHO assumes no responsibility for indirect damages, including, for example, loss of customers, sales, production, profits, image, as well as damage to the buyer resulting from possible claims derived from damage caused to third parties.

FARHO will be exempt of any responsibility for any damages due to, for example:

- Misuse or improper, abnormal or excessive use.
- Improper, incorrect or deficient maintenance.
- Non-conventional usage of the product or usage which is contrary to the seller's guidelines, or different from what the product is intended for.
- Use of the product with other components.
- Improper storage.

ANY PROBLEM WITH YOUR
NEXHO PRODUCT
WILL ONLY BE ATTENDED
BY THE DISTRIBUTOR IN
YOUR COUNTRY

FARHO S.L.U.
Polígono Industrial Tabaza II, Parcelas 9 a 13
Telephones: (+34) 985 514 082 – (+34) 985 514 605
Fax: (+34) 985 514 164
33438 Tabaza (Asturias)
www.FARHO.com

NEXHO-NM

Distributed by:.....

Purchase date:..... of 20.....

FITTER:.....

Name:.....Town/City:.....

Home
address:.....Telephone:.....

USER:

Name:.....Town/City:.....

Home
address:.....Telephone:.....

In service:.....

No.....Fitter's stamp

To be completed by the fitter



UNIÓN EUROPEA
Fondo Europeo
de Desarrollo Regional
Una manera de hacer Europa